



SENSITIVITY – TEMPERATURE SENSOR – PLUG-IN - RESPONSIVITY

AWA temperature sensors measure at the position of highest thermal impact

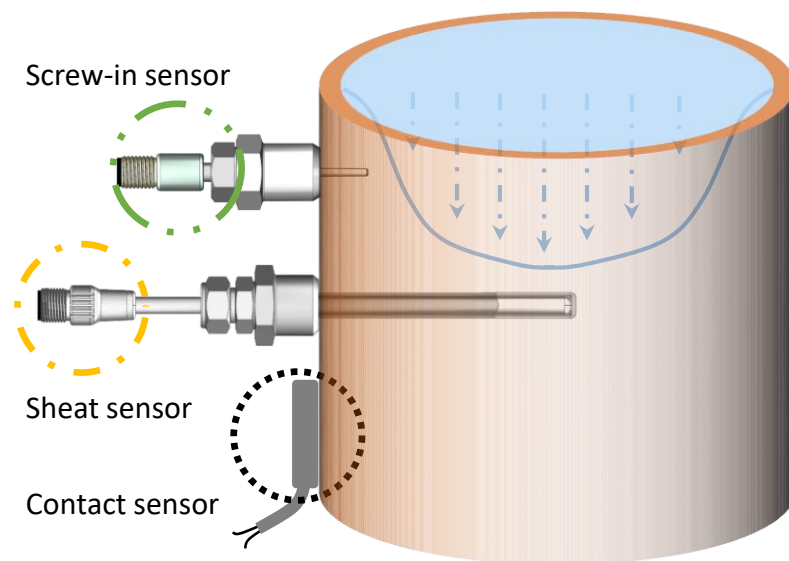

- ✓ Minimized thermal gap
(no tube wall, less thermal resistance, no ambient temperature drop)
- ✓ Response time < 3,5 s
- ✓ Suitable for pipe diameters from DN6 to DN300
- ✓ Refrigerant: CO₂, NH₃, HFO, A2L
- ✓ Signal: Pt 1000, 4...20 mA
- ✓ Accessories: screw-in fitting, thermowell, sensor cable

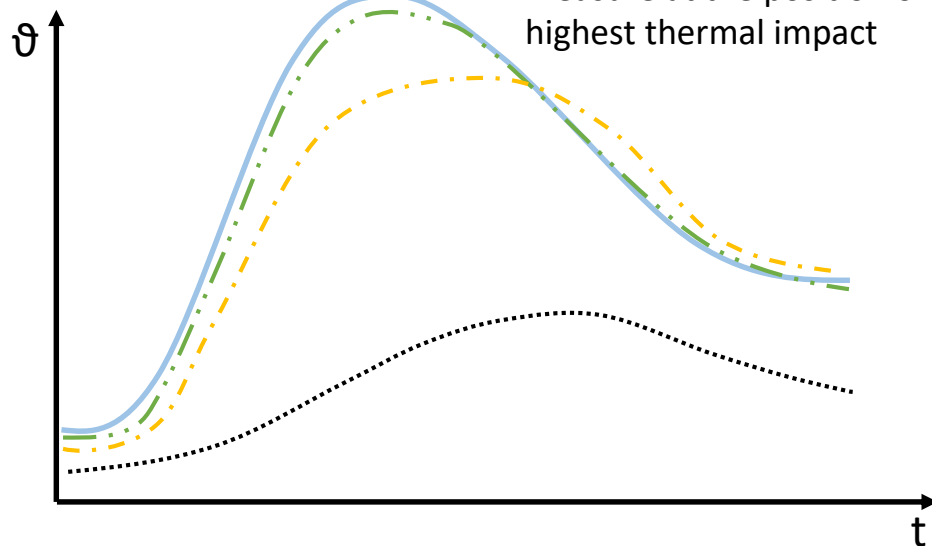